


E27 PENDANT LAMP - EU VERSION

FURNITURE / LIGHTING / ACCESSORIES

MATTIAS STÅHLBOM ON THE DESIGN "The simplicity of the naked bulb is hard to compete with. It stands for something that feels romantic and contemporary at the same time. E27 departs from the essence of a lamp - the socket - creating a simple yet strong object that celebrates the potential beauty in simplicity."

PRODUCT FACT SHEET

PROCESS	E27 is pressed in vulcanised silicone rubber under high temperature. The cord is extruded. Inside socket and cord is assembled by hand.
DESIGNED BY / YEAR OF DESIGN	Mattias Ståhlbom / 2008
TYPE	Pendant lamp
LAMP DESCRIPTION	E27 can be used as a single light source, in pairs, rows or even in clusters to create a modern Scandinavian chandelier.
ENVIRONMENT	Indoor
MATERIAL	Silicone/rubber, plastic socket and PVC cord.
CORD LENGTH (MM/ INCHES)	4000 mm / 157.5" - Longer cord is available for projects.
BULB INCLUDED	Yes.
DIMMABLE FUNCTION	Yes
CANOPY / BALDAKIN	No. Offered separately.
CLEANING INSTRUCTIONS	Clean with soft dry cloth only. Always switch off the electricity supply before cleaning.
ABOUT THE DESIGNER	Mattias Ståhlbom is an internationally successful architect and partner at the Stockholm-based architecture and design studio TAF. TAF's aim is to make ordinary life less ordinary through subtle but effective changes in how products and architecture appear and function. Mattias Ståhlbom's products have been exhibited at prestigious venues such as MOMA and the Swedish National Museum in Stockholm.

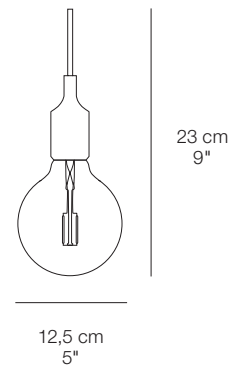

E27 PENDANT LAMP - EU VERSION

FURNITURE / LIGHTING / ACCESSORIES

PRODUCT FACT SHEET

MATTIAS STÅHLBOM ON THE DESIGN "The simplicity of the naked bulb is hard to compete with. It stands for something that feels romantic and contemporary at the same time. E27 departs from the essence of a lamp - the socket - creating a simple yet strong object that celebrates the potential beauty in simplicity."


LAMP RATING

VOLTAGE	220-240V
FREQUENCY	50Hz
IP RATING	P20
CLASSIFICATION	Class II
SOCKET	1 x E27 Max. 40W; Double envelope halogen lamp Max. 6W; LED bulb



BULB SPECIFICATION

ITEM	G125 halogen bulb
WATT	18 W
LUMEN	210
KELVIN	2700K
LIFETIME	1800-2000h
CRI	≥80
DIMMABLE	Yes
ITEM	G125 LED filament bulb
WATT	2 W
LUMEN	>80lm/W
KELVIN	2500K
LIFETIME	25.000h
CRI	≥90
DIMMABLE	Yes

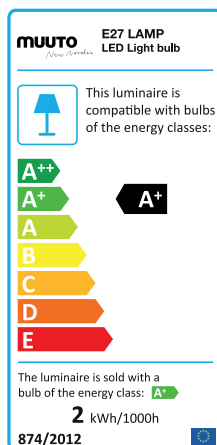

GENERAL STANDARDS & CERTIFICATES

EU/UK	USA/CANADA	AUSTRALIEN/NEW ZEALAND	CHINA	EXTRA
CE-LVD EN 60598-1:2015 EN 60598-2-1:1989 EN 62493:2015	UL UL 1598 CAN/CSA C22.2 No. 250.0-08	RCM AS/NZS 60238:2007	CCC GB7000. 201-2008 GB7000. 1-2007	Glow wire test

WEEE

FRANCE	GERMANY	TAIWAN	JAPAN
COFRAC EN 60598-1:2008+A11:2009 EN 60598-2-1:1989	VDE Certifi cate for Socket DIN EN 60238 (VDE 0616 Teil 1):2009-04 EN 60238:2004+A1:2008-09 Certifi cate for Cord DIN EN 0281-5 (VDE 0281 Teil 5):2002-09 HD 21.5 S3:1994+A1:1999+A2:2001	BSMI CNS14115 IEC60598/2/4 CNS14335	PSE IEC 60598-1:2008+Japan deviation IEC 60598-2-1:1979+A1:1987 Certifi cate for Cord Certifi cate for Socket